

# 60 WATTS


## SINGLE OUTPUT AC-DC

### FEATURES:

- Compact 2.0" x 3.0" x 1.0" Size
- 3 Year Warranty
- Universal 85-264V Input
- Single Output
- 90% Peak Efficiency
- 87% Average Efficiency
- <300mW No Load Input Power
- IEC 60601-1 3<sup>rd</sup> ed. Medical Cert.
- IEC 60950-1 2<sup>nd</sup> ed. ITE Certification
- IEC 60601-1-2 4<sup>th</sup> ed. EMC
- Class B Emissions per EN55011/32
- 0-70°C Operating Temperature
- RoHS Compliant
- Optional Chassis/Cover








CHASSIS/COVER



OPEN FRAME

### SAFETY SPECIFICATIONS

	Underwriters Laboratories File E137708/E140259	UL 60950-1:2007, 2 <sup>nd</sup> Edition AAMI/ANSI ES60601-1:2005(R) 2012
		CB Reports/Certificates (including all National and Group Deviations) IEC 60950-1/A2:2013, 2 <sup>nd</sup> Edition IEC 60601-1:2005/A1:2012
	UL Recognition Mark for Canada File E137708/E140259	CAN/CSA-C22.2 No. 60950-1-07, 2 <sup>nd</sup> Edition CAN/CSA-C22.2 No. 60601-1:2014
	TUV	EN 60950-1/A2:2013, 2 <sup>nd</sup> Edition EN 60601-1:2006/A1:2013
	Low Voltage Directive RoHS Directive (Recast)	(2014/35/EU of February 2014) (2011/65/EU of June 2011)

### MODEL LISTING

MODEL	OUTPUT	P <sub>OUT</sub>
GRN-60-1001	3.3V/9.0A	30W
GRN-60-1002	5.0V/9.0A	45W
GRN-60-1003	12V/5.0A	60W
GRN-60-1004	15V/4.0A	60W
GRN-60-1005	24V/2.5A	60W
GRN-60-1006	28V/2.2A	60W
GRN-60-1007	48V/1.3A	60W
GRN-60-1008	19V/3.1A	60W

### ORDERING INFORMATION

Consult factory for alternate output configurations.  
Please specify the following optional features when ordering:

CH - Chassis	OVP - Overvoltage Protection
CO - Cover	DF - Dual Fuse

# GRN-60

## OUTPUT SPECIFICATIONS

Output Power at 50°C <sub>(1)</sub> (See Derating Chart)	60W	85-264 V <sub>in</sub>
Voltage Centering	±0.5%	(Output at 50% load)
Voltage Adjust Range	95-105%	
Load Regulation	±0.5%	(0-100% load change)
Source Regulation	0.5%	
Ripple & Noise	1.0%	<150mV (1001,1002)
Turn-On Overshoot	None	
Transient Response	Output recovers to within 1% of initial set point due to a 50% step load change, 500µs maximum, 5% maximum deviation (maximum deviation on 1001: 8%, 1002: 6%).	
Overvoltage Protection	Latching, between 110% and 150% of rated output voltage (optional).	
Overpower Protection	110-160% rated P <sub>OUT</sub> min., cycle on/off, auto recovery	
Hold-Up Time	10ms typical, full power, 115V input	
Start-Up Time	1 sec., 115/230V input	
Output Rise Time	27ms typical	
Minimum Load	No minimum load required	

## INPUT SPECIFICATIONS

Protection Class	I	
Source Voltage	85 - 264 VAC (see derating chart)	
Frequency Range	47 - 63 Hz	
Input Protection <sup>(5)</sup>	Internal 2A time-delay fuse, 1500A breaking capacity	
Peak Inrush Current	50A max. at 230 V	
Peak Efficiency	90%	
Average Efficiency	87% (1003-1008), 85% (1002), 80% (1001)	
Light Load Efficiency	85%, 115/230 V <sub>in</sub> , 33% power, 81% (1001), 84% (1002)	
No Load Input Power	<0.3W, 115/230 V <sub>in</sub> , no load	

## ENVIRONMENTAL SPECIFICATIONS

Cooling	Free air convection	
Ambient Operating Temperature Range	0° to + 70°C	
Derating	Derating: see power rating chart	
Ambient Storage Temp. Range	- 40° to + 85°C	
Operating Relative Humidity Range	20-90% non-condensing	
Altitude	10,000 ft. ASL	Operating
	40,000 ft. ASL	Non-operating
Temperature Coefficient	0.02%/°C	
Vibration	2.5G swept sine, 7-2000Hz, 1 octave/min, 3 axis, 1 hour each.	
Shock	20G, 11ms, 3 axis, 3 each direction.	

## GENERAL SPECIFICATIONS

Means of Protection	Primary to Secondary 2MOPP (Means of Patient Protection)	
	Primary to Ground 1MOPP (Means of Patient Protection)	
	Secondary to Ground Operational Insulation(Consult factory for 1MOOP or 1MOPP)	
Dielectric Strength <sup>(7, 8)</sup>	Reinforced Insulation 5656 VDC, Primary to Secondary	
	Basic Insulation 2121 VDC, Primary to Ground	
	Operational Insulation 707 VDC, Secondary to Ground	
Leakage Current	Earth Leakage <300µA NC, <1000µA SFC	
	Touch Current <100µA NC, <500µA SFC	
Switching Frequency	65 KHz	
Remote Sense <sup>(9)</sup>	400 mV compensation of output cable losses	
Mean-Time Between Failures	>250,000 hours, MIL-HDBK-217F, 25° C, GB	
Weight	0.24 lbs. Open frame/0.34 lbs. Chassis and cover	

## EMC SPECIFICATIONS (IEC 60601-1-2:2014, 4<sup>TH</sup> ed./IEC 61000-6-2:2005)

Electrostatic Discharge	EN 61000-4-2	±8KV contact / ±15KV air discharge	A
Radiated Electromagnetic Field	EN 61000-4-3	80MHz-2.7GHz, 10V/m, 80% AM	A
Electrical Fast Transients/Bursts	EN 61000-4-4	±2 KV, 5KHz/100KHz	A
Surge Immunity	EN 61000-4-5	±2 KV line to earth / ±1 KV line to line	A
Conducted Immunity	EN 61000-4-6	0.15 to 80MHz, 10V, 80% AM	A
Magnetic Field Immunity	EN 61000-4-8	30A/m, 60 Hz.	A
Voltage Dips	EN 61000-4-11	0% U <sub>r</sub> , 0.5 cycles, 0-315°	100/240V A/A
		0% U <sub>r</sub> , 1 cycles, 0°	100/240V A/A
		40% U <sub>r</sub> , 10/12 cycles, 0°	100/240V B/A
		70% U <sub>r</sub> , 25/30 cycles, 0°	100/240V B/A
Voltage Interruptions	EN 61000-4-11	0% U <sub>r</sub> , 300 cycles, 0°	100/240V B/B
Radiated Emissions	EN 55011/32	Class B	
Conducted Emissions	EN 55011/32	Class B	
Harmonic Current Emissions	EN 61000-3-2	Class A	
Voltage Fluctuations/Flicker	EN 61000-3-3	Compliant	

All specifications are maximum at 25°C/60W unless otherwise stated, may vary by model and are subject to change without notice.

PROUDLY DISTRIBUTED BY:




Power Sources Unlimited, Inc.  
200 Stonewall Boulevard, Suite 4  
Wrentham, MA 02093-2210  
WWW.PSUI.COM

1-800-966-PSUI (7784)  
Outside U.S. 508-384-1419  
Fax: 508-384-1896  
info@psui.com


POWER  
WITHOUT  
LIMITS

06/06/17

## GRN-60 SINGLE MECHANICAL SPECIFICATIONS

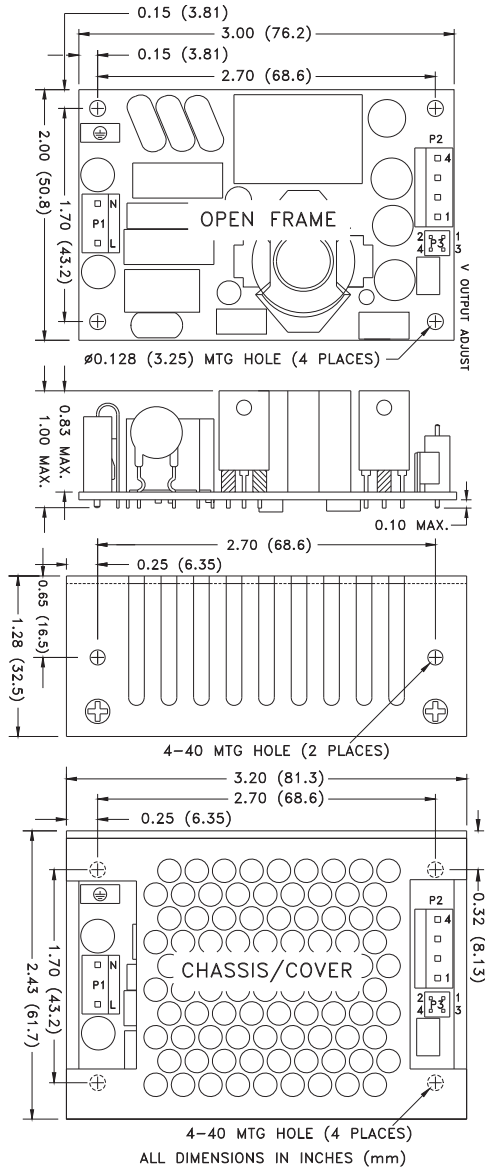


## CONNECTOR SPECIFICATIONS

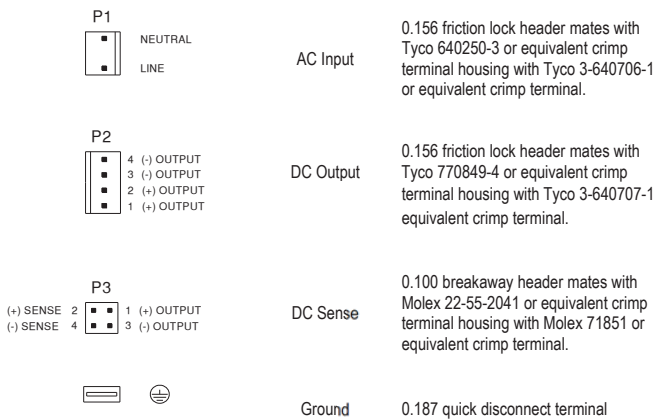


## APPLICATIONS INFORMATION

1. Continuous Output Power must not exceed 60W.
2. Generally, adequate cooling is provided when semiconductor case temperatures do not exceed 70°C rise and transformer temperature does not exceed 60°C rise at any specified ambient temperature.
3. Sufficient area must be provided around power supply to allow natural movement of air to develop in convection-cooled applications.
4. This product is intended for use as a professionally-installed component within information technology, industrial, and medical equipment and is not intended for stand-alone operation.
5. Standard models include only one fuse in the input circuit. In consideration of clause 8.11.5 of IEC 60601-1-1:2005, a second fuse may be required in neutral conductor of the end product. Models with the suffix DF include a fuse in the line and neutral leads.
6. Peak-to-Peak Output Ripple and Noise is measured directly at the output terminals of the power supply, without the use of the probe ground lead or retractable tip (tip-and-barrel method), 20 MHz bandwidth.
7. This product was type-tested and safety-certified using the dielectric strength test voltages listed in Table 6 of IEC60601-1:2005. In consideration of clause 8.8.3, care must be taken to insure that the voltage applied to a reinforced insulation does not overstress different types and levels of insulation. Primary and secondary-to-ground capacitors may need to be disconnected prior to performing a dielectric strength type test on the power supply or the end product. It is highly recommended that the DC test voltage listed in DVB.1, annex DVB of UL60601-1 1<sup>ST</sup> Edition are not exceeded during a production-line dielectric strength test of the assembled end product. Please consult factory for further information.
8. This power supply has been safety-approved and final-tested using a DC dielectric strength test. Please consult factory before performing an AC dielectric strength test.
9. Remote-Sense terminals may be used to compensate for cable losses up to 400mV, depending on model. The use of a twisted pair, decoupling capacitors and an appropriately-rated low-impedance capacitor connected across the load will increase noise immunity.
10. Maximum screw penetration into bottom chassis mounting holes is 0.100 inches. Maximum screw penetration into side chassis mounting holes is 0.188 inches.
11. To comply with emissions specifications, all four mounting hole pads must be electrically connected to a common metal chassis. Chassis/Cover option is recommended. Refer to Operating Instructions for additional information.
12. Common RF shielding precautions may need to be taken to assure emissions compliance. Refer to Operating Instructions for additional information.

## TYPICAL EFFICIENCY vs. LOAD

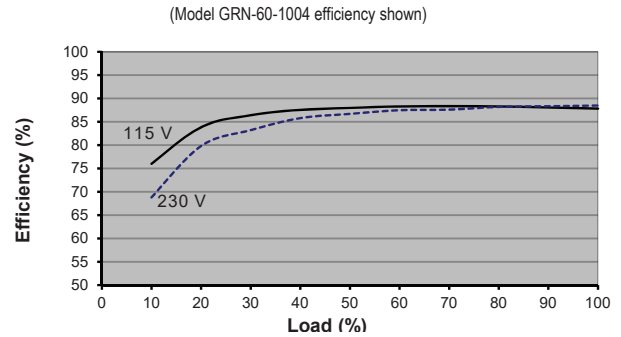

## MAX P<sub>OUT</sub> vs. AMBIENT TEMPERATURE/INPUT VOLTAGE

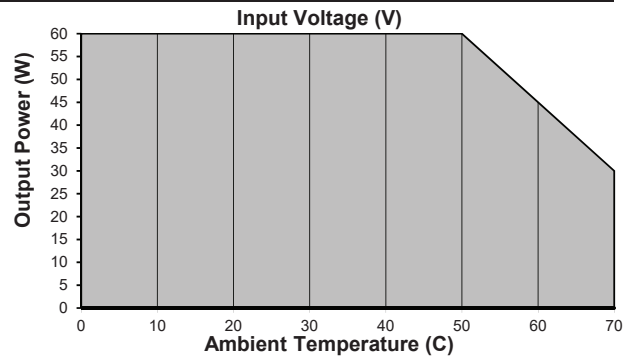

Derating requirements - Derate from 100% load at 50°C to 50% load at 70°C.

PROUDLY DISTRIBUTED BY:



Power Sources Unlimited, Inc.  
 200 Stonewall Boulevard, Suite 4  
 Wrentham, MA 02093-2210  
 WWW.PSUI.COM

1-800-966-PSUI (7784)  
 Outside U.S. 508-384-1419  
 Fax: 508-384-1896  
 info@psui.com

**POWER  
 WITHOUT  
 LIMITS**

06/06/17

REV. Q 2/23/2017