

DESCRIPTION

The PUP121L/ PUP121LS/ PUP151/ PUP151S series of AC/DC switching power supplies are for 120-150 watts of continuous output power. They are enclosed in a 94V-0 rated plastic case with an inlet of the IEC320/C14 or IEC320/C6 to mate with interchangeable cord for world-wide use. All models meet EN55022, EN55024 and FCC class B emission limits, and comply with UL, CSA, IEC and CE requirements.

FEATURES

- No load power consumption less than 0.21 W
- Meet efficiency level VI
- Meet Energy Star EPS2.0 /ErP lot 7
- Operating altitude up to 5000 meters
- Overvoltage protection (latch)
- Short-circuit protection (auto-recovery)
- Overpower protection (auto-recovery)
- Over temperature protection (latch)
- High Efficiency $\geq 88\%$
- With PFC circuit
- 100% burn-in at full rated load
- Compliant with RoHS requirements

INPUT SPECIFICATIONS

Input voltage:	90-264 VAC
Input frequency:	47-63 Hz
Input current:	2.0 A (rms) for 115 VAC 1.0 A (rms) for 230 VAC
Touch current:	250 μ A max. @ 264 VAC, 60 Hz

OUTPUT SPECIFICATIONS

Output voltage /current:	See rating chart.
Maximum output power:	See rating chart.
Ripple and noise:	350 mV peak to peak maximum
Overvoltage protection:	Set at 125-155% of its nominal output voltage
Overcurrent protection:	All models protected to short circuit conditions (auto-recovery)
Temperature coefficient:	All outputs $\pm 0.04\%$ / $^{\circ}$ C maximum
Transient response:	Maximum excursion of 4% or better on all models, recovering to 1% of final value within 500 us after a 25% step load change

ENVIRONMENTAL SPECIFICATIONS

Operating temperature:	0 $^{\circ}$ C to +40 $^{\circ}$ C
Storage temperature:	-20 $^{\circ}$ C to +80 $^{\circ}$ C
Relative humidity:	10% to 90% non-condensing

PUP121L/PUP151 SERIES



RoHS



SAFETY STANDARD APPROVALS



UL 60950-1, CSA C22.2 No. 60950-1
File No. E190414



TUV EN 60950-1

GENERAL SPECIFICATIONS

Hold-up time:	10 ms minimum at 100 VAC
Turn on delay time:	3 s maximum at 100 VAC
Power factor:	0.95 typical
Efficiency:	88% minimum at 110 VAC or 240 VAC.
Line regulation:	$\pm 0.5\%$ maximum at full load
Inrush current:	100 A @ 115 Vac or 200 A @ 230 Vac at 25 $^{\circ}$ C cold start
Withstand voltage:	1500 VAC from input to output and ground
MTBF:	500,000 hours at full load at 25 $^{\circ}$ C ambient, calculated per SR332

EMC Performance

EN55022:	Class B conducted, Class B radiated
FCC:	Class B conducted, Class B radiated
VCCI:	Class B conducted, Class B radiated
EN61000-3-2:	Harmonic distortion, Class D
EN61000-3-3:	Line flicker
EN55024	
EN61000-4-2:	ESD, ± 8 KV air and ± 4 KV contact
EN61000-4-3:	Radiated immunity, 3 V/m
EN61000-4-4:	Fast transient/burst, ± 1 KV
EN61000-4-5:	Surge, ± 1 KV diff., ± 2 KV com.
EN61000-4-6:	Conducted immunity, 3 Vrms
EN61000-4-8:	Magnetic field immunity, 1 A/m
EN61000-4-11:	Voltage dip immunity, 30% reduction for 500 ms, and $>95\%$ reduction for 10 ms


OUTPUT VOLTAGE/CURRENT RATING CHART

Model ⁽¹⁾	Output						Average Active efficiency (typical) @ 115 / 230 Vac
	V1	Min. Current	Max. Current	Tol.	Ripple & Noise ⁽²⁾	Max. Power	
PUP121L-12	12 V	0 A	10 A	±5%	350 mV	120 W	88.4 /89.4%
PUP121LS-12	12 V	0 A	10 A	±5%	350 mV	120 W	88.4 /89.4%
PUP151-12	12 V	0 A	12.5 A	±5%	350 mV	150 W	88.8 /90.0%
PUP151S-12	12 V	0 A	12.5 A	±5%	350 mV	150 W	88.8 /90.0%
PUP151-13-2	19 V	0 A	7.89 A	±5%	350 mV	150 W	88.8 /90.0%
PUP151S-13-2	19 V	0 A	7.89 A	±5%	350 mV	150 W	88.8 /90.0%
PUP151-14	24 V	0 A	6.25 A	±5%	350 mV	150 W	90.0 /91.0%
PUP151S-14	24 V	0 A	6.25 A	±5%	350 mV	150 W	90.0 /91.0%

NOTES:

1. PUP121L /PUP151 models are equipped with IEC320/C14 inlet, and PUP121LS /PUP151S models with IEC320/C6 inlet.
2. Ripple and noise is maximum peak-to-peak voltage value measured at output within 20 MHz bandwidth, at rated line voltage and output load ranges, and with a 10 µF tantalum capacitor in parallel with a 0.1 µF ceramic capacitor across the output.

MECHANICAL SPECIFICATIONS

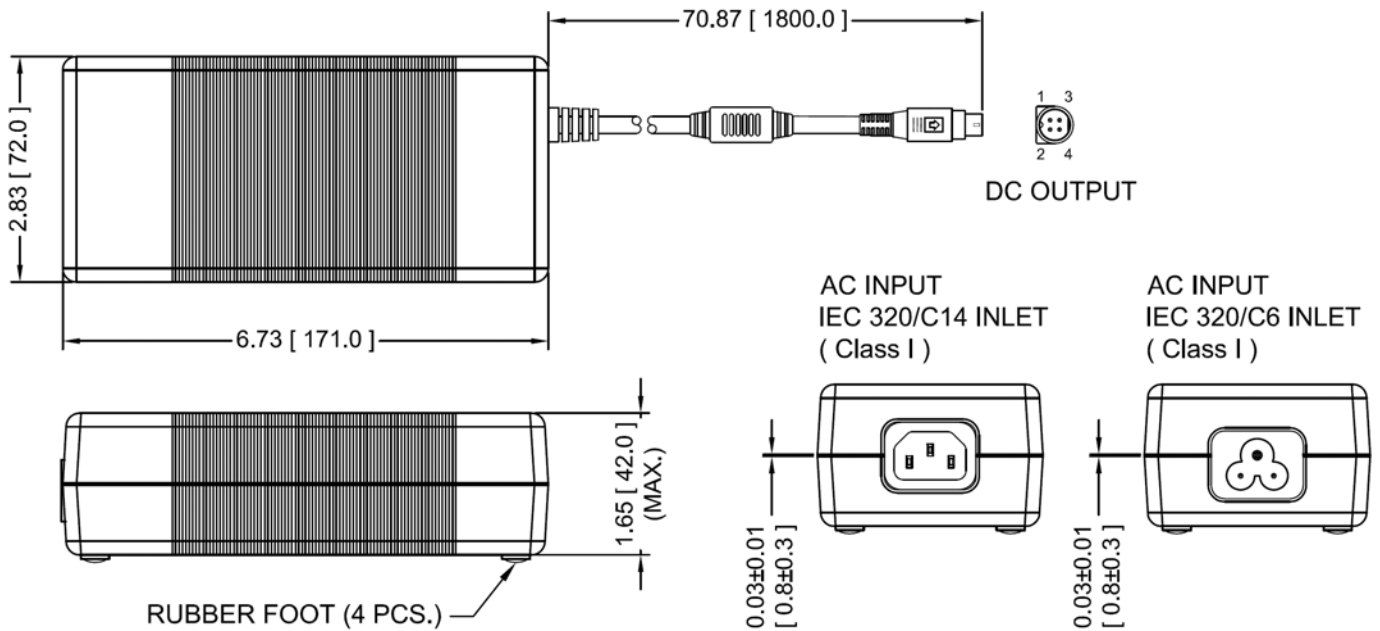

NOTES:

1. Dimensions shown in inches [mm]
2. Tolerance 0.02 [0.5] maximum
3. Weight: 800 grams (1.76 lbs.) approx.
4. Refer to Section titled "OPTIONAL OUTPUT CONNECTORS". Change suffix assigned for a selected connector to a wanted model number, e.g. PUP151-14-B1, for ordering.
5. The length of output cable for output voltage 12V is 37.4 [950.0].

PIN CHART

PIN NO.	1	2	3	4	SHELL OF CONNECTOR
Polarity	+V1	+V1	V1 Return & AC Ground	V1 Return & AC Ground	V1 Return & AC Ground

