


- Wide 2:1 input voltage
- I/O isolation 5000 VACrms rated for 250 VACrms working voltage
- Certification according to IEC/EN/ES 60601-1 3rd edition for 2xMOPP
- Risk management process according to ISO 14971 including risk management file
- Acceptance criteria for electronic assemblies according to IPC-A-610 Level 3
- Low leakage current
- Extended operating temperature range -40°C to 90°C.
- Input filter to meet EN55022 class A
- Operating up to 5000m altitude
- 5 year product warranty A



The THM-3 series is a range of medical 3 Watt DC/DC converters in DIP-24 plastic package and with wide 2:1 input voltage range. They provide a reinforced isolation system for 5000 VACrms isolation and a very low leakage current of less than 2 µA. The units are approved to IEC/EN/ES 60601-1 3rd edition for 2 x MOPP (Means Of Patient Protection) and come along with an ISO 14971 risk management file. Design and production conform to the quality management system ISO 13485. With a high efficiency of up to 87% and highest grade components the converters can reliably operate in an ambient temperature range of -40°C up to +90°C. They constitute a reliable solution not only for medical equipment but also for demanding ranges of application such as transportation, control & measurement or IGBT drivers.

| Models | | | | |
|------------|----------------------------------|----------------|---------------------|-----------------|
| Order code | Input voltage range | Output voltage | Output current max. | Efficiency typ. |
| THM 3-0510 | 4.5 – 9 VDC (5 VDC nominal) | 3.3 VDC | 1000 mA | 81.0 % |
| THM 3-0511 | | 5.0 VDC | 600 mA | 84.5 % |
| THM 3-0512 | | 12 VDC | 250 mA | 85.5 % |
| THM 3-0513 | | 15 VDC | 200 mA | 87.5 % |
| THM 3-0515 | | 24 VDC | 125 mA | 85.5 % |
| THM 3-0521 | | ±5.0 VDC | ±300 mA | 83.0 % |
| THM 3-0522 | | ±12 VDC | ±125 mA | 86.0 % |
| THM 3-0523 | | ±15 VDC | ±100 mA | 86.0 % |
| THM 3-1210 | 9.0 – 18 VDC (12 VDC nominal) | 3.3 VDC | 1000 mA | 82.0 % |
| THM 3-1211 | | 5.0 VDC | 600 mA | 84.5 % |
| THM 3-1212 | | 12 VDC | 250 mA | 87.0 % |
| THM 3-1213 | | 15 VDC | 200 mA | 87.0 % |
| THM 3-1215 | | 24 VDC | 125 mA | 87.0 % |
| THM 3-1221 | | ±5.0 VDC | ±300 mA | 83.5 % |
| THM 3-1222 | | ±12 VDC | ±125 mA | 87.5 % |
| THM 3-1223 | | ±15 VDC | ±100 mA | 86.5 % |
| THM 3-2410 | 18 – 36 VDC (24 VDC nominal) | 3.3 VDC | 1000 mA | 82.0 % |
| THM 3-2411 | | 5.0 VDC | 600 mA | 84.5 % |
| THM 3-2412 | | 12 VDC | 250 mA | 87.0 % |
| THM 3-2413 | | 15 VDC | 200 mA | 87.0 % |
| THM 3-2415 | | 24 VDC | 125 mA | 87.0 % |
| THM 3-2421 | | ±5.0 VDC | ±300 mA | 83.0 % |
| THM 3-2422 | | ±12 VDC | ±125 mA | 87.0 % |
| THM 3-2423 | | ±15 VDC | ±100 mA | 86.0 % |
| THM 3-4810 | 36 – 75 VDC (48 VDC nominal) | 3.3 VDC | 1000 mA | 81.0 % |
| THM 3-4811 | | 5.0 VDC | 600 mA | 84.0 % |
| THM 3-4812 | | 12 VDC | 250 mA | 87.0 % |
| THM 3-4813 | | 15 VDC | 200 mA | 86.5 % |
| THM 3-4815 | | 24 VDC | 125 mA | 86.5 % |
| THM 3-4821 | | ±5.0 VDC | ±300 mA | 83.0 % |
| THM 3-4822 | | ±12 VDC | ±125 mA | 86.0 % |
| THM 3-4823 | | ±15 VDC | ±100 mA | 86.0 % |

PROUDLY DISTRIBUTED BY:



Power Sources Unlimited, Inc.®

Power Sources Unlimited, Inc.
200 Stonewall Boulevard, Suite 4
Wrentham, MA 02093-2210
WWW.PSUI.COM

1-800-966-PSUI (7784)
Outside U.S. 508-384-1419
Fax: 508-384-1896
info@psui.com

POWER WITHOUT LIMITS

Input Specifications

| | |
|-----------------------------|---|
| Input current no load | 5 Vin models: 20 mA typ. 12 Vin models: 10 mA typ. 24 Vin models: 6 mA typ. 48 Vin models: 4 mA typ. |
| Surge voltage (3 sec. max.) | 5 Vin models: 16 V max. 12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max. |
| Start-up voltage | 5 Vin models: 4.5 VDC (or lower) 12 Vin models: 9 VDC (or lower) 24 Vin models: 18 VDC (or lower) 48 Vin models: 36 VDC (or lower) |
| Startup time | 30 ms |
| Under voltage shut down | 5 Vin models: 4 VDC typ. 12 Vin models: 8 VDC typ. 24 Vin models: 16 VDC typ. 48 Vin models: 33 VDC typ. |
| Conducted noise | EN55022 class A (internal filter) |
| EMC immunity | <ul style="list-style-type: none"> – ESD (electrostatic discharge) EN 61000-4-2, air ± 8 kV, contact ± 6 kV, perf. criteria A – Radiated immunity EN 61000-4-3, 10 V/m, perf. criteria A – Fast transient / surge EN 61000-4-4, ± 2 kV, perf. criteria A – (with external input capacitor / diode) EN 61000-4-5, ± 2 kV perf. criteria A 5 Vin models: Nippon chemi-con KY 1000 μF/ 25 V and reverse diode (Vishay V10P45) in parallel 12 & 24 Vin models: Nippon chemi-con KY 470 μF/ 50 V 48 Vin models: Nippon chemi-con KY 330 μF/ 100 V – Conducted immunity EN 61000-4-6, 10 Vrms, perf. criteria A – Magnetic field immunity EN 61000-4-8 100 A/m, continuous, perf. criteria A 1000 A/m, 1 sec., perf. criteria A |

Output Specifications

| | |
|-------------------------------------|--|
| Voltage set accuracy | ± 1 % max. |
| Regulation | <ul style="list-style-type: none"> – Input variation single output: 0.2% max. dual output: 0.5% max. – Load variation 0 – 100 % single output: 0.2% max. dual output: 1.0% max. – Cross regulation dual output: 5.0% max. (asymmetrical load 25/100%) |
| Minimum load | not required |
| Ripple and noise (20 MHz Bandwidth) | 3.3 & 5.0 VDC models: 30 mVp-p typ. with cap. 10 μ F/25 V X7R MLCC 12 & 15 VDC models: 40 mVp-p typ. with cap. 10 μ F/25 V X7R MLCC 24 VDC models: 50 mVp-p typ. with cap. 4.7 μ F/50V X7R MLCC |
| Transient response | – Recovery time (25% load step change) 250 μ s typ. |
| Over load protection | at 150 % typ. of lout rated (hiccup mode) |
| Short circuit protection | Continuous, automatic recovery |
| Over voltage protection | <ul style="list-style-type: none"> –Single output 3.3 VDC models: 3.7 – 5.0 VDC 5.0 VDC models: 5.6 – 7.0 VDC 12 VDC models: 13.5 – 16.0 VDC 15 VDC models: 18.3 – 22.0 VDC 24 VDC models: 29.1 – 34.5 VDC –Dual output ± 5 VDC models: 5.6 – 7.0 VDC ± 12 VDC models: 13.5 – 18.2 VDC ± 15 VDC models: 17.0 – 22.0 VDC |

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

PROUDLY DISTRIBUTED BY:



Power Sources Unlimited, Inc.
200 Stonewall Boulevard, Suite 4
Wrentham, MA 02093-2210
WWW.PSUI.COM

1-800-966-PSUI (7784)
Outside U.S. 508-384-1419
Fax: 508-384-1896
info@psui.com

**POWER
WITHOUT
LIMITS**

General Specifications

| | | |
|--|--|--|
| Capacitive load | -Single output | 3.3 VDC models: 1'050 µF max. 5.0 VDC models: 750 µF max. 12 VDC models: 130 µF max. 15 VDC models: 100 µF max. 24 VDC models: 39 µF max. |
| | -Dual output | ±5 VDC models: 430 µF max. (each output) ±12 VDC models: 75 µF max. (each output) ±15 VDC models: 56 µF max. (each output) |
| Temperature ranges | - Operating (designed for) - Rated according to IEC/EN 60601-1 - Case temperature - Storage temperature | -40°C to +90°C (without derating) -40°C to +80°C (without derating) +105°C max. -55°C to +125°C |
| Thermal impedance | | 18°C/W |
| Humidity (non condensing) | | 5 % to 95 % rel H max. |
| Isolation voltage (50Hz, 60sec) | - to meet ES/IEC/EN 60601-1 | 5000 VACrms, rated for 250 VACrms working voltage, 2 × MOPP |
| Clearance/creepage | | 8 mm min. |
| Leakagecurrent (at 240VAC, 60Hz) | | 2 µA max. |
| Isolation capacitance (input/output) | | 17 pF max. |
| Altitude during operation | | 5000 m |
| Temperature coefficient | | ±0.02 %/K typ. |
| Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign) | | 6'400'000 h |
| Switching frequency | | 150 kHz ±15 kHz (pulse width modulation) |
| Vibration and thermal shock resistance | | according to MIL-STD-810F |
| Safety standards/approvals | - Medical equipment - Certification documents | ANSI/AAMI ES60601-1:2005/(R)2012, IEC/EN60601-1 3rd edition www.tracopower.com/products/overview/thm3 |
| Environmental compliance | - Reach - RoHS | www.tracopower.com/products/reach-declaration.pdf RoHS directive 2011/65/EU |

Physical Specifications

| | |
|-----------------------|------------------------------|
| Casing material | non-conductive black plastic |
| Base material | non-conductive black plastic |
| Potting material | silicone (UL94 V-0 rated) |
| Package weight | 14 g (0.48oz) |
| Soldering temperature | max. 265°C / 10 sec |



- The component is not be used in an oxygen rich environment.
- The component is not to be used in conjunction with flammable anaesthetics and agents.
- The component has to be disposed appropriately. Please refer to local regulations (Waste Electrical and Electronic Equipment).
- A modification of the component is not allowed.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

PROUDLY DISTRIBUTED BY:




Power Sources Unlimited, Inc.
200 Stonewall Boulevard, Suite 4
Wrentham, MA 02093-2210
WWW.PSUI.COM

1-800-966-PSUI (7784)
Outside U.S. 508-384-1419
Fax: 508-384-1896
info@psui.com

**POWER
WITHOUT
LIMITS**


Outline Dimensions

Standard pinning

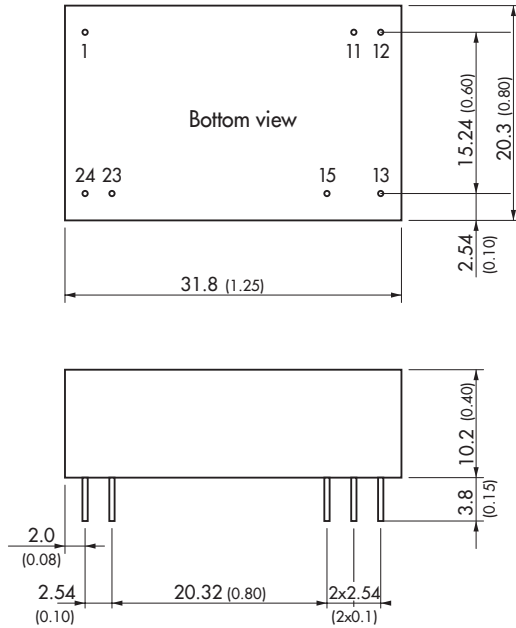

| Standard Pinout | | |
|-----------------|------------|------------|
| Pin | Single | Dual |
| 1 | +Vin (Vcc) | +Vin (Vcc) |
| 11 | No pin | Common |
| 12 | -Vout | No pin |
| 13 | +Vout | -Vout |
| 15 | No pin | +Vout |
| 23 | -Vin (GND) | -Vin (GND) |
| 24 | -Vin (GND) | -Vin (GND) |

Optional pinning: suffix **-B1**

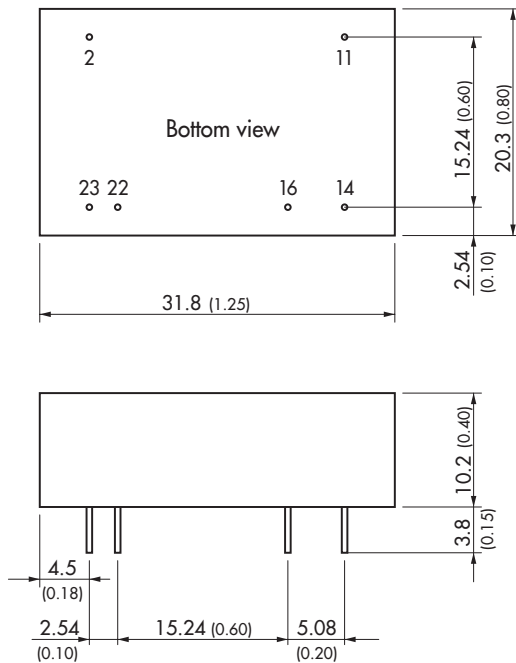

| Optional Pinout | | |
|-----------------|------------|------------|
| Pin | Single | Dual |
| 2 | -Vin (GND) | -Vin (GND) |
| 11 | No con. | -Vout |
| 14 | +Vout | +Vout |
| 16 | -Vout | Common |
| 22 | +Vin (Vcc) | +Vin (Vcc) |
| 23 | +Vin (Vcc) | +Vin (Vcc) |

Remark: No suffix **-B1** for 5 Vin models. Corresponding parts are with THM 3WI series by default. see www.tracopower.com/overview/thm3wi

Dimensions in [mm], () = Inch
 Tolerances ± 0.5 (± 0.02)
 Pin $\varnothing 0.6 \pm 0.1$ (0.024 ± 0.004)
 Pin pitch tolerances ± 0.25 (± 0.01)

PROUDLY DISTRIBUTED BY:



Power Sources Unlimited, Inc.
 200 Stonewall Boulevard, Suite 4
 Wrentham, MA 02093-2210
 WWW.PSUI.COM

1-800-966-PSUI (7784)
 Outside U.S. 508-384-1419
 Fax: 508-384-1896
 info@psui.com

**POWER
 WITHOUT
 LIMITS**