


### Features

- ◆ Single-in-line package (SIP)
- ◆ I/O isolation 1'000 VDC
- ◆ High efficiency up to 80%
- ◆ Operating temperature -40°C to +85°C
- ◆ Industry standard pinout
- ◆ 100% burn-in (8 h)
- ◆ Lead free design, RoHS compliant
- ◆ 3-year product warranty

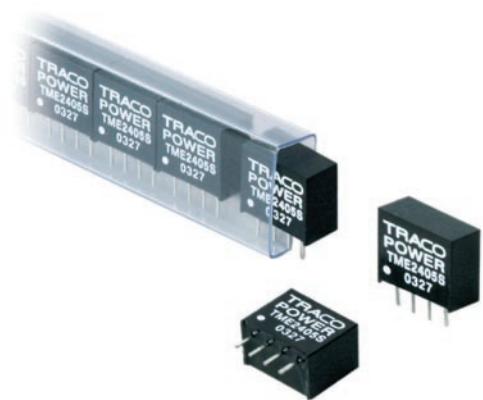

The TME series is a range of sub-miniature, isolated DC/DC-converters in a SIP-package, which requires only 0.7 cm<sup>2</sup> of board space. They provide a cost effective solution to generate supplementary, isolated voltages. Full SMD-design and a 100% production test of parameters ensure a high reliability of this product.

### Models

Ordercode	Input voltage	Output voltage	Output current max.	Efficiency typ.
<b>TME 0303S</b>		3.3 VDC	260 mA	74 %
<b>TME 0305S</b>	<b>3.3 VDC ±10%</b>	5.0 VDC	200 mA	77 %
<b>TME 0503S</b>		3.3 VDC	260 mA	72 %
<b>TME 0505S</b>		5 VDC	200 mA	70 %
<b>TME 0509S</b>		9 VDC	110 mA	76 %
<b>TME 0512S</b>		12 VDC	80 mA	77 %
<b>TME 0515S</b>		15 VDC	65 mA	78 %
<b>TME 1205S</b>		5 VDC	200 mA	71 %
<b>TME 1209S</b>		9 VDC	110 mA	77 %
<b>TME 1212S</b>		12 VDC	80 mA	79 %
<b>TME 1215S</b>		15 VDC	65 mA	80 %
<b>TME 2405S</b>		5 VDC	200 mA	70 %
<b>TME 2409S</b>		9 VDC	110 mA	76 %
<b>TME 2412S</b>		12 VDC	80 mA	79 %
<b>TME 2415S</b>		15 VDC	65 mA	79 %
<b>24 VDC ±10%</b>				

**Input Specifications**

Input current no load /full load	3.3 Vin models: 35 mA / 370 mA typ. 5 Vin models: 30 mA / 260 mA typ. 12 Vin models: 13 mA / 110 mA typ. 24 Vin models: 7 mA / 55 mA typ.
Surge voltage (1 sec. max.)	3.3 Vin models: 6 V max. 5 Vin models: 9 V max. 12 Vin models: 18 V max. 24 Vin models: 30 V max.
Reverse voltage protection	0.3 A max.
Reflected input ripple current	can be reduced by ext. 1–3.3 µF polyester film capacitor
Input filter	Internal capacitors

**Output Specifications**

Voltage set accuracy	±3 %	
Regulation	– Input variation – Load variation 20 – 100 %	1.2 % / 1 % change Vin 10 % max.
Ripple and noise (20 MHz Bandwidth)	150 mV pk-pk max.	
Temperature coefficient	±0.02 %/K	
Short circuit protection	limited 1 sec. max.	
Capacitive load	33 µF max.	

**General Specifications**


Temperature ranges	– Operating – Case temperature – Storage	-40°C to +85°C +95°C max. -40°C to +105°C
Humidity (non condensing)		95 % rel H max.
Reliability, calculated MTTF (MIL-HDBK-217F, @+25°C ground benign)		>2'000'000 h
Isolation voltage (60 sec.)	Input/Output	1'000 VDC
Isolation capacity	Input/Output	60 pF typ.
Isolation resistance	Input/Output	>1'000 Mohm
Switching frequency		90 kHz typ. (Frequency modulation)
Frequency change over line and load		±30 % max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

## Physical Specifications

Casing material	non conductive black plastic (UL 94-V0 rated)	
Package weight	3.3 / 5.0 / 12 Vin models 24 Vin models	1.3 g (0.05 oz) 1.7 g (0.06 oz)
Soldering temperature	max. 265°C / 10 sec.	

## Outline Dimensions mm (inches)

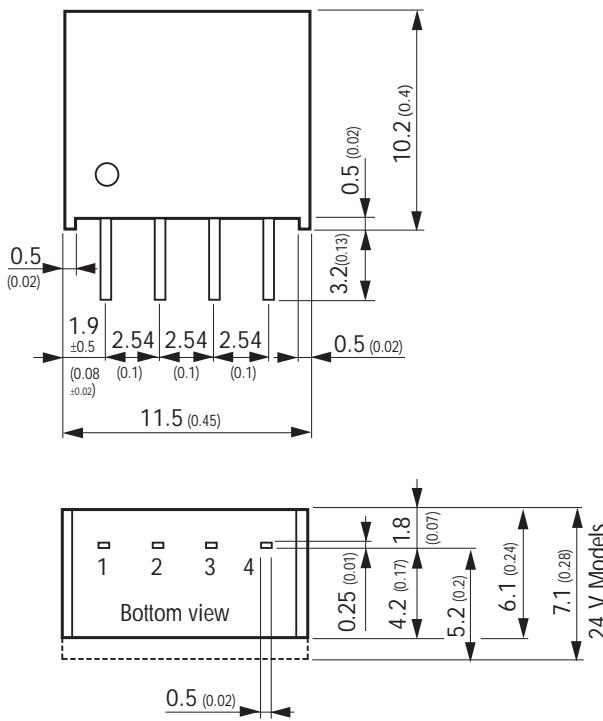

Tolerances  $\pm 0.25$  ( $\pm 0.01$ )  
 Pin pitch tolerance  $\pm 0.13$  ( $\pm 0.005$ )  
 pins  $\pm 0.05$  ( $\pm 0.002$ )

Specifications can be changed any time without notice.

Rev. 06/10

**Page 3 of 3**

**Distributed by:** Power Sources Unlimited, Inc., Wrentham, MA Tel: 508-384-1419 | E-mail: sales@psui.com | Website: www.psui.com