

DC/DC Converter

TDN 3WISM Series, 3 Watt

- Ultra compact SMD package
13,2 × 9,1 × 10,2 mm
- I/O-isolation 1'500 VDC
- Fully regulated outputs
- Operating temperature range
-40°C to +70°C without derating
- Short circuit protection
- Remote On/Off
- 3-year product warranty



Also see:

TDN 3WI, DIP version

www.tracopower.com/products/tdn3wi.pdf

The TDN 3WISM Series comprises 3 Watt fully regulated, high performance DC/DC converters. They come in a compact cubical package of only 1.23 cm³. Full load operation is reliable up to 70°C environment temperature. With 1'500 VDC I/O-isolation voltage, external On/Off, and short current protection they cover a wide range of application when space is limited. The input of the converters is designed for a wide voltage range (4:1) and minimum load is not required.

Models				
Order code	Input voltage	Output voltage	Output current max.	Efficiency typ.
TDN 3-1210WISM	4.5 – 18 VDC (12 VDC nominal)	3.3 VDC	700 mA	76 %
TDN 3-1211WISM		5.0 VDC	600 mA	80 %
TDN 3-1212WISM		12 VDC	250 mA	83 %
TDN 3-1213WISM		15 VDC	200 mA	84 %
TDN 3-1215WISM		24 VDC	125 mA	82 %
TDN 3-1221WISM		± 5.0 VDC	±300 mA	80 %
TDN 3-1222WISM		±12 VDC	±125 mA	82 %
TDN 3-1223WISM		±15 VDC	±100 mA	82 %
TDN 3-2410WISM	9 – 36 VDC (24 VDC nominal)	3.3 VDC	700 mA	77 %
TDN 3-2411WISM		5.0 VDC	600 mA	80 %
TDN 3-2412WISM		12 VDC	250 mA	83 %
TDN 3-2413WISM		15 VDC	200 mA	83 %
TDN 3-2415WISM		24 VDC	125 mA	82 %
TDN 3-2421WISM		± 5.0 VDC	±300 mA	80 %
TDN 3-2422WISM		±12 VDC	±125 mA	82 %
TDN 3-2423WISM		±15 VDC	±100 mA	82 %
TDN 3-4810WISM	18 – 75 VDC (48 VDC nominal)	3.3 VDC	700 mA	77 %
TDN 3-4811WISM		5.0 VDC	600 mA	80 %
TDN 3-4812WISM		12 VDC	250 mA	83 %
TDN 3-4813WISM		15 VDC	200 mA	83 %
TDN 3-4815WISM		24 VDC	125 mA	82 %
TDN 3-4821WISM		± 5.0 VDC	±300 mA	80 %
TDN 3-4822WISM		±12 VDC	±125 mA	82 %
TDN 3-4823WISM		±15 VDC	±100 mA	82 %

PROUDLY DISTRIBUTED BY:

TRACO POWER

- DC/DC Converter
- Ultra compact SMD package
13,2 x 9,1 x 10,2 mm
 - I/O-isolation 1'500 VDC
 - Fully regulated outputs
 - Operating temperature range
-40°C to +70°C without derating
 - Short circuit protection
 - Remote On/Off
 - 3-year product warranty



The TDN 3WISM Series comprises 3 Watt fully regulated, high performance DC/DC

Power Sources Unlimited, Inc.
200 Stonewall Boulevard, Suite 4
Wrentham, MA 02093-2210
WWW.PSUI.COM

1-800-966-PSUI (7784)
Outside U.S. 508-384-1419
Fax: 508-384-1896
info@psui.com

**POWER
WITHOUT
LIMITS**

Input Specifications

Input current no load	12 Vin models: 40 mA typ. 24 Vin models: 25 mA typ. 48 Vin models: 13 mA typ.
Surge voltage (1 sec. max.)	12 Vin models: 25 V max. 24 Vin models: 50 V max. 48 Vin models: 100 V max.
Reflected ripple current	20 mA _{p-p} typ., see supporting documents
Conducted noise	EN 55022 class A or B with external components, see supporting documents
ESD (electrostatic discharge)	EN 61000-4-2, air ±8 kV, contact ±6 kV, perf. criteria A
Radiated immunity	EN 61000-4-3, 10 V/m, perf. criteria A
Fast transient / surge (with external input capacitor)	EN 61000-4-4, ±2 kV, perf. criteria A EN 61000-4-5, ±1 kV perf. criteria A
–external input capacitor	all models: Nippon chemi-con KY 220µF/100V
Conducted immunity	EN 61000-4-6, 10 Vrms, perf. criteria A
Magnetic field immunity	EN 61000-4-8, 100 A/m continuous, perf. criteria A 1000 A/m 1 second, perf criteria A

Output Specifications

Voltage set accuracy	±1 % max.
Regulation	– Input variation: 0.2 % max. – Load variation 0 – 100 %: 1 % max. – cross regulation - dual output: 5 % max. (asymmetrical load 25 % / 100 %)
Temperature coefficient	±0.02 %/K typ.
Ripple and noise (20 MHz Bandwidth)	50 mV _{p-p} typ.
Start up time (constant resistive load)	– Power ON: 10 ms max. – Remote ON: 10 ms max.
Transient response (25% load step change)	500 µs typ.
Short circuit protection	continuous, automatic recovery
Capacitive load	–Single output: 3.3 VDC models: 4700 µF max. 5.0 VDC models: 2530 µF max. 12 VDC models: 1220 µF max. 15 VDC models: 1000 µF max. 24 VDC models: 470 µF max. –Dual output: ±5.0 VDC models: 1470 µF max. (each output) ±12 VDC models: 680 µF max. (each output) +15 VDC models: 470 µF max. (each output)

General Specifications

Temperature ranges	– Operating (convection cooling 20LFM, 0,1m/s): –40°C to +70°C (without derating) – Case temperature: +95°C max. – Storage temperature: –55°C to +125°C
Derating	2.9%/K above 70°C
Humidity (non condensing)	5 – 95 % rel H max.
Isolation voltage	– I/O isolation voltage (60 sec.): 1'500 VDC
Isolation capacitance	50 pF max.
Isolation resistance (@ 500 VDC)	>1 Gohm

PROUDLY DISTRIBUTED BY:



Power Sources Unlimited, Inc.®

Power Sources Unlimited, Inc.
200 Stonewall Boulevard, Suite 4
Wrentham, MA 02093-2210
WWW.PSUI.COM

1-800-966-PSUI (7784)
Outside U.S. 508-384-1419
Fax: 508-384-1896
info@psui.com

POWER WITHOUT LIMITS

General Specifications


Reliability, calculated MTBF (MIL-HDBK-217F at +25°C, ground benign)	5'627'000 h
Switching frequency	100 kHz min. Pulse frequency modulation.
Thermal shock & vibration	MIL-STD-810F
Remote On/Off	-On: open circuit or high impedance -Off: 2 – 4 mA current applied via 1kOhm resistor -Off idle current: 2.5 mA max.
Environmental compliance	- Reach www.tracopower.com/products/reach-declaration.pdf - RoHS RoHS directive 2011/65/EU
Moisture sensitivity level (MSL)	IPC J-STD-033B Level 2

Physical Specifications

Casing material	non-conducting FR4 (UL 94V-0 rated)
Potting material	silicone (UL 94V-0 rated)
Base material	non-conducting FR4 (UL 94V-0 rated)
Package weight	2.7g (0.10oz)
Soldering temperature	max. 260°C / 6 sec
Lead-free reflow solder process	according to IPC J-STD-020D

Supporting Documents: www.tracopower.com/overview/tdn3wism

Outline Dimensions

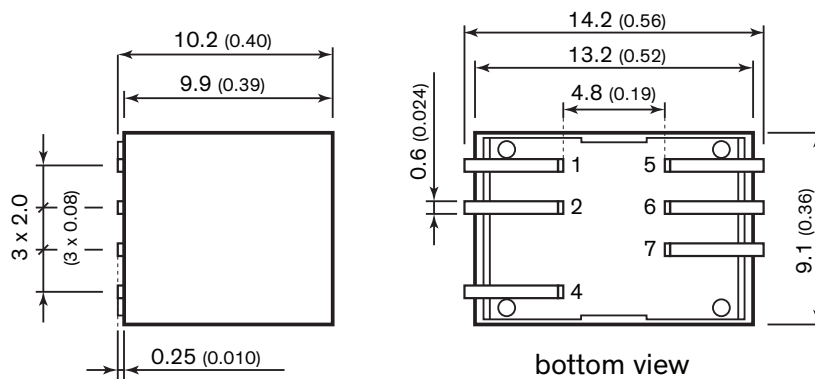

Pin-Out

Pin	Single	Dual
1	+Vin (Vcc)	+Vin (Vcc)
2	-Vin (GND)	-Vin (GND)
4	On/Off	On/Off
5	no con.	-Vout
6	-Vout	Common
7	+Vout	+Vout

Dimensions in [mm], () = Inch

Tolerances: x.x ±0.5 (±0.02)

Pin pitch tolerances ±0.25 (±0.01)

Pin dimension tolerance ±0.1 (±0.004)

PROUDLY DISTRIBUTED BY:



Power Sources Unlimited, Inc.
 200 Stonewall Boulevard, Suite 4
 Wrentham, MA 02093-2210
 WWW.PSUI.COM

1-800-966-PSUI (7784)
 Outside U.S. 508-384-1419
 Fax: 508-384-1896
 info@psui.com

**POWER
 WITHOUT
 LIMITS**