



TRH50A SERIES

50W SWITCHING ADAPTER



Features

- * Universal Input Range 90~264VAC
- * Meets EN55022 Class B and CISPR/FCC Class B
- * Continuous Short Circuit Protection
- * Over Voltage Protection
- * Meet CoC Tier 2 & DoE Level VI
(Output Cable Length \leq 1800mm)
(TRH50A120, TRH50A150: Output Cable Length \leq 1220mm)
(TRH70A180, TRH70A190: Output Cable Length \leq 1800mm 16AWG)
- * No load Power Consumption < 150mW

Ordering information

TRH50XXX	- XX	E	XX
Model No.	DC Plug Type	OVP	DC Cable Length and Type
			01: 720mm
			02: 1220mm
			03: 1800mm
			11: 720mm with Ferrite Core
			12: 1220mm with Ferrite Core
			13: 1800mm with Ferrite Core
			* 16AWG / UL1185 FOR 12V,15V,18V,19V
			* 18AWG / UL1185 FOR 24V,28V,36V,48V



MODEL	OUTPUT VOLTAGE	OUTPUT CURRENT	RIPPLE & NOISE NOTE 1	VOLTAGE ACCURACY NOTE 2	LINE REGULATION NOTE 3	LOAD REGULATION NOTE 4	AVERAGE EFFICIENCY min. NOTE 5
TRH50A120	12V	4.2A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	89%
TRH50A150	15V	3.36A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 3\%$	89%
TRH50A180	18V	2.8A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A190	19V	2.65A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A240	24V	2.1A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A280	28V	1.8A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A360	36V	1.4A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%
TRH50A480	48V	1.05A	1%	$\pm 2\%$	$\pm 1\%$	$\pm 2\%$	89%



Distributed by:

Power Sources Unlimited, Inc. Wrentham, MA • Tel: 508-384-1419 • sales@psui.com • www.psui.com

Specifications

INPUT SPECIFICATIONS:

Voltage 90~264Vac
 Frequency 47 to 63Hz
 Input Current 1.2A max.
 Inrush Current Cold Start @25°C 100A max. @ 240Vac
 Leakage Current 3.5mA max.

OUTPUT SPECIFICATIONS:

Hold-up Time 8ms typ. @115Vac
 Short Circuit Protection Continuous(Auto Recovery)
 Over Voltage Protection TVS Component to Clamp
 Temperature Coefficient ±0.05%/°C

GENERAL SPECIFICATIONS:


Isolation Input to output = 4,242VDC
 Operating Temperature -20 ~ 70°C (see derating curve)
 Storage Temperature -20 ~ 85°C
 Humidity 93% RH max. Non condensing
 Cooling Natural Convection
 Switching Frequency 65KHz Typical
 MTBF MIL-HDBK-217F, GB, at 25°C/115VAC 200Khrs min.
 Altitude 5000m
 Dimensions 4.724x2.047x1.220 inches (120.00x52.00x31.00mm)
 Weight 300g
 AC Inlet IEC320/C14

SAFETY AND EMC:


Emission and Immunity EN55022 Class B, FCC Part 15 Class B
 EN61000-6-3, EN61000-3-2, EN61000-3-3
 EN55024, EN61204-3, EN61000-6-1
 Safety Class I, IEC60950-1, EN60950-1, UL60950-1

Mechanical Specification

All Dimensions are in inches(mm)
 Tolerance: Inches: X.XXX±0.02
 Millimeters: X.XX±0.5

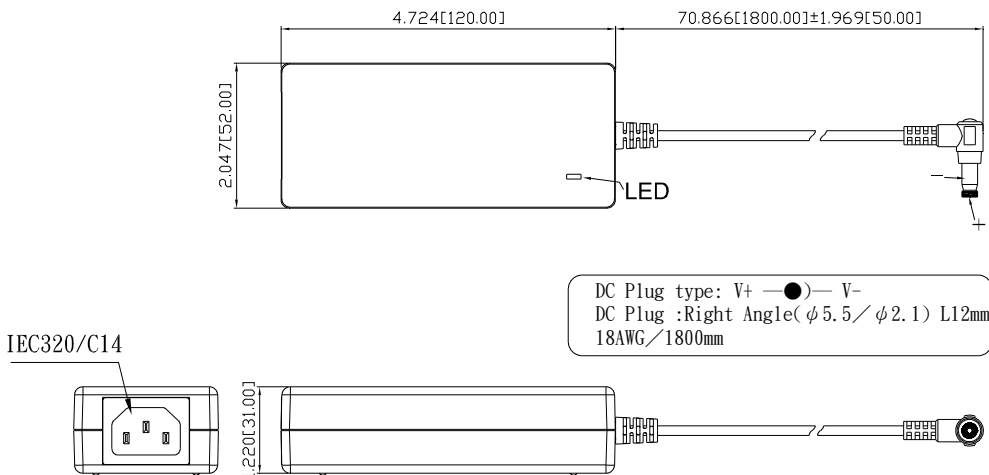

TRH50A Series Derating Curve

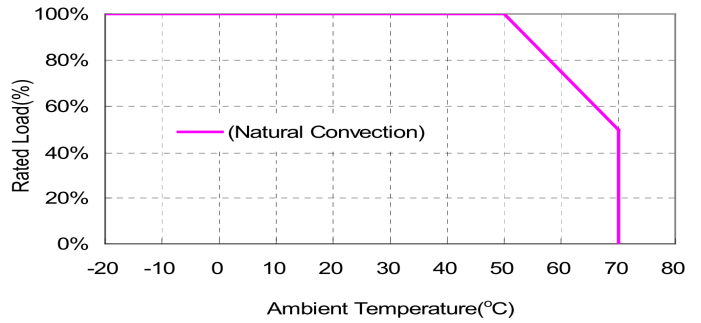

NOTE:

1. Add a 0.1uF ceramic capacitor and a 10uF E.L. capacitor to output for Ripple & Noise measuring @20MHz BW.
2. Voltage setpoint at 60% full load.
3. Line regulation measured from 100Vac to 240Vac full load.
4. Load regulation measured from 60% to full load and from 60% to 20% load (60% +/- 40% load).
5. Average Efficiency measured at 25%, 50%, 75%, 100% load and input voltage is 115Vac / 230Vac.



Distributed by:
Power Sources Unlimited, Inc. Wrentham, MA • Tel: 508-384-1419 • sales@psui.com • www.psui.com

Typical at 25°C, nominal line and 75% load, unless otherwise Specified